

## SPECIFICATIONS

### General

Description	Monochrome wide format print/copy/scan with color scanner
Type	Electrophotography (LED) with organic photoconductor (OPC) and closed toner system
Range of Productivity	6 D or 4 D per minute / 360 or 240 prints per hour
Warm Up Time (from cold)	Less than 2 minutes from standby
Configurations	MFP
Roll Options	2 Roll or 1 Roll
Output Delivery	Top / Optional Rear
Dimensions	63" (w) x 28" (d) x 59" (h) / 1590 mm x 700 mm x 1510 mm
Weight	538 lb. / 244 kg
Electrical Requirements	120V plus/minus 10%, 50/60Hz, 12A
Power Consumption (Standby)	500W
Power Consumption (Printing)	1,100W

### Printer

Print Resolution	600 dpi x 2400 dpi
Roll Capacity	2 Roll or 1 Roll
Output Sizes Width	11" - 36"
Output Sizes Length	20' / 6 m (standard), 500'/150 m based on media validation
Paper Weight	Bond 18-24 lb., Vellum/Translucent Bond 18-20 lb., film 3.5 - 4 mil
Media Type	Bond / Vellum / Film


### Controller

Controller Type	KIP System K Controller with Windows 7 Embedded
Memory	2GB DDR3 Standard - Upgradable to 4 GB
Hard Drive	Minimum 320 GB - Unlimited Upgrade
Supported File Type	DWF, PDF, PDF-A, HPGL 1/2, HP-RTL, Calcomp 906/907, CALS Group 4, TIFF Group 4, CIT/TG4, Grayscale TIFF, TIFF Packbits, PNG, JPEG

### Scanner

Scanner Type	CIS
Scan Resolution	600 dpi
Scan Format	TIFF, Multipage TIFF, PDF, PDF-A, Multipage PDF, DWF, JPEG
Scan Destination	Local USB (removable media), Mailboxes (local), FTP, SMB Cloud: Google Drive/Dropbox/Box/OneDrive/SharePoint
Original Size Width	11" - 36" / 210 mm to 914 mm
Original Thickness	0.05 mm - 1.60 mm (image quality over 0.25 mm not guaranteed)

# KIP 71 SERIES

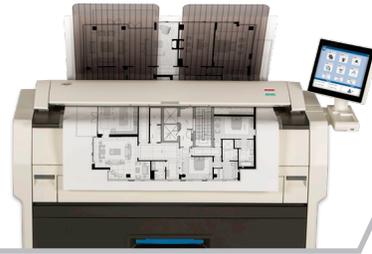


## INSTALLATION


### Space, Electrical, and Environmental Requirements

Weight	538 lb. / 244 kg
Dimensions	63" (w) x 28" (d) x 59" (h) / 1590 mm (w) x 700 mm (d) x 1510 mm (h)
Electrical (Dedicated)	120V +/- 10%, 50/60 Hz, 15 amp or higher
Electrical Receptacle	Nema 5-15 R
Max. Power Consumption	1,100 W (printing), 500 W (standby)
Acoustic Noise	Idle: max. 50 db Printing: max. 57 db
Room Temperature	50-86°F (10-32°C)
Room Humidity	15-85% (non condensing)


### Spatial Requirements (top view not to scale)

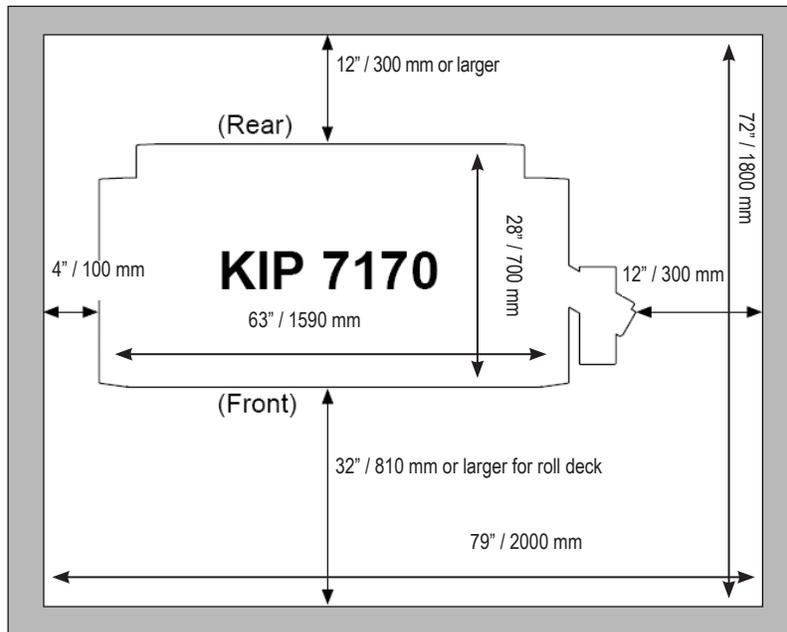

Spatial Requirements with KIPFold 1000 (top view not to scale)

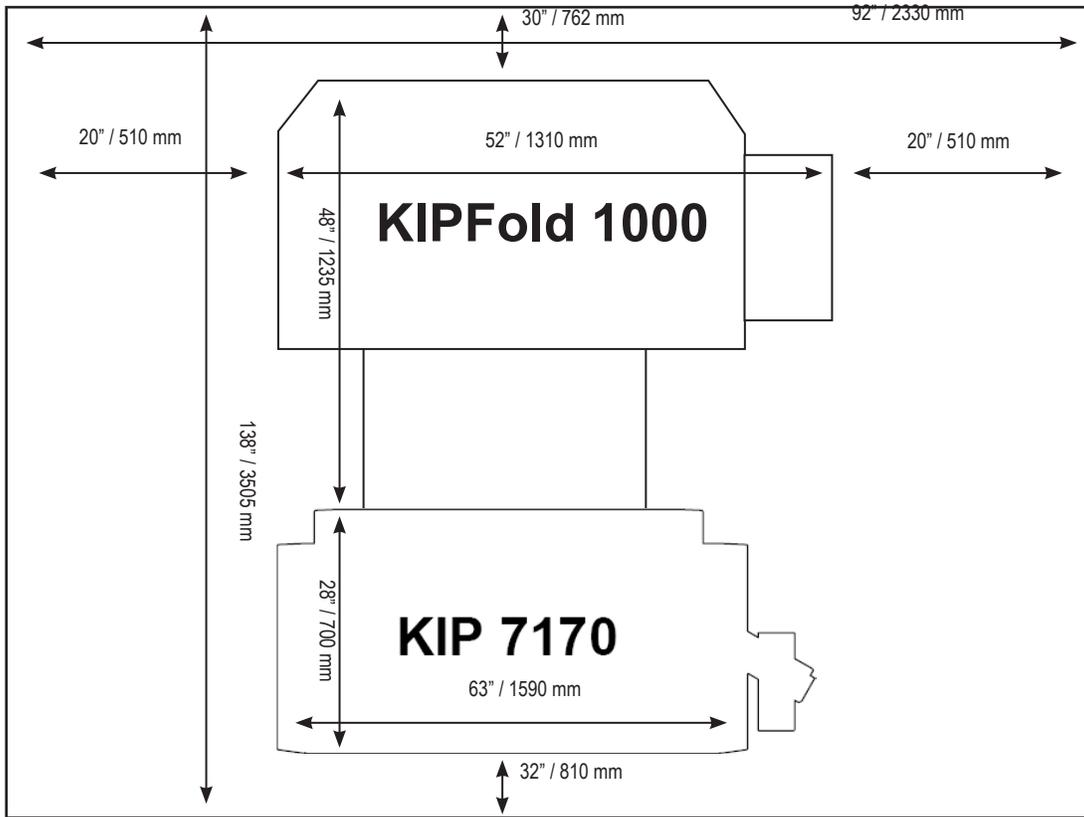

Spatial Requirements with KIPFold 2800 (top view not to scale)

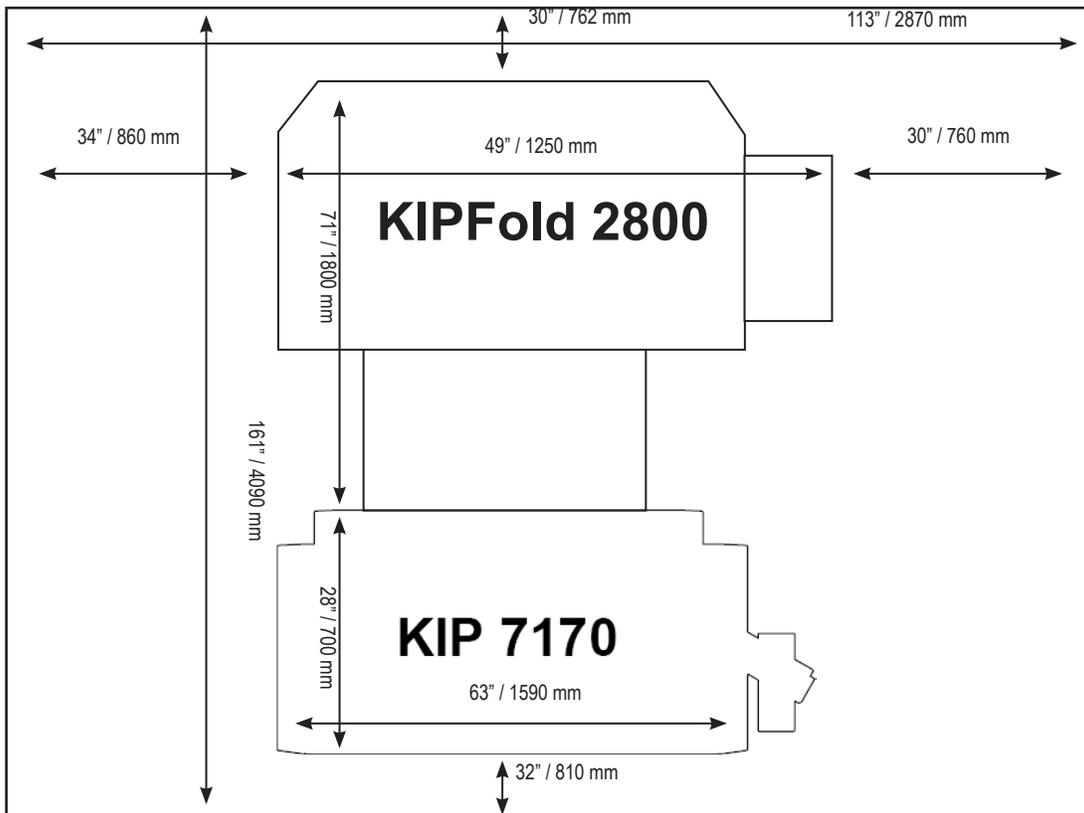




# KIP 71 SERIES

## CONFIGURATIONS & PRODUCTIVITY


### KIP 7171

- 240 D Size Prints Per Hour
- 1 Roll





### KIP 7171

- 360 D Size Prints Per Hour
- 1 Roll





### KIP 7172

- 240 D Size Prints Per Hour
- 2 Rolls

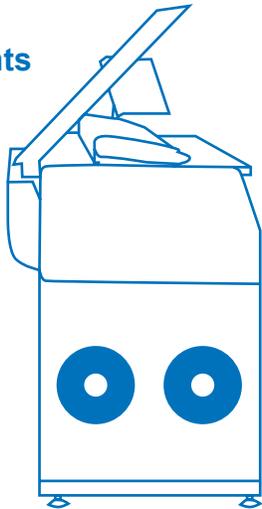

### KIP 7172

- 360 D Size Prints Per Hour
- 2 Rolls

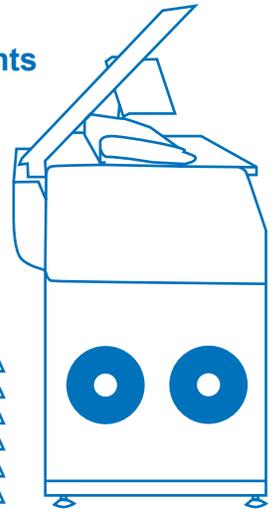

KYOCERA Document Solutions America, Inc.  
Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA  
©2019 KYOCERA Document Solutions America, Inc.