

# MA2000w & PA2000w Setup Quick Guide



# Table of Contents

1. Wireless Setup for Windows (Non WPS)	<b>03</b>
2. Wireless Setup for Windows (WPS)	<b>05</b>
3. Wireless Setup for MAC (WPS)	<b>06</b>
4. USB Setup for MAC	<b>08</b>




# Wireless Setup for Windows (Non WPS)

## Step 1

Before setting up printer you first must, download the Web Installer from [Kyocera.info](https://www.kyocera.com) and run the installer. This will install all software required.

1. Open a browser on your computer and type in **Kyocera.info**.
2. Enter your model # and click the model when it shows.

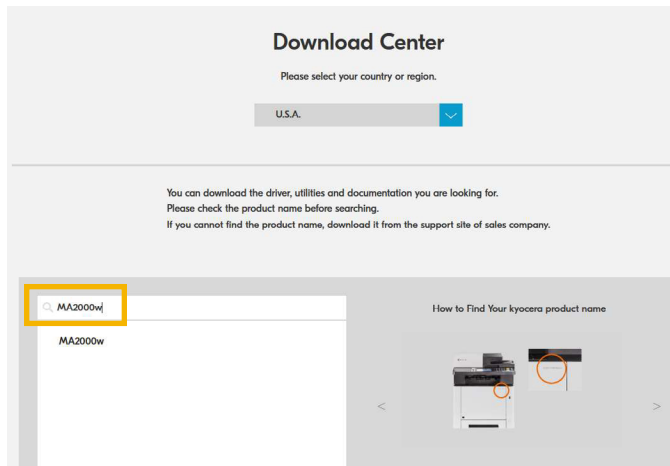


3. Scroll down the page and download the Web Installer and install it on your computer.

Download			
Recommended	Driver	Utility	Manual
File name	Version	Release date	File size
Web Installer	1.8.4.0	2022/03/11	16.6MB


4. Press and hold [Main Power] (●) for 2 seconds or more to turn the power ON.

5. Connect the USB cable to the printer's USB interface connector.

**Note:** Use a USB cable with a rectangular Type A plug and a square Type B plug. The USB cable should be shielded and no longer than 5 meters (16 feet) long.


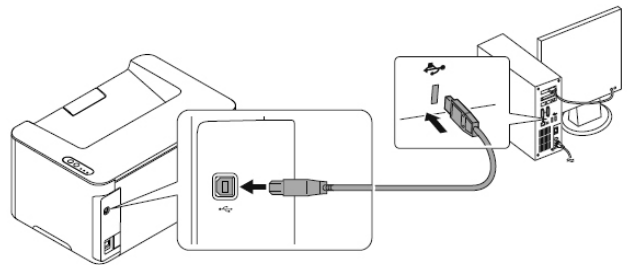


6. Click the Start button on Windows > click **Kyocera** > **KYOCERA Client Tool**.
7. Open the KYOCERA Client Tool.

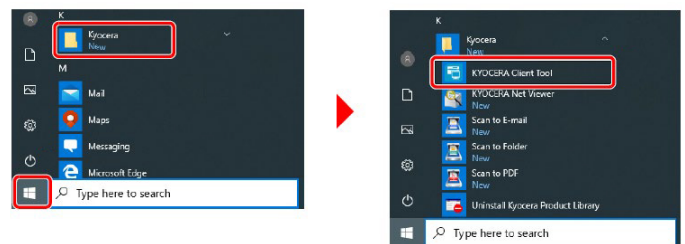


## Step 2

1. Click the Wireless Network settings tab > Wireless Network Setup Tool.
3. Press next again.

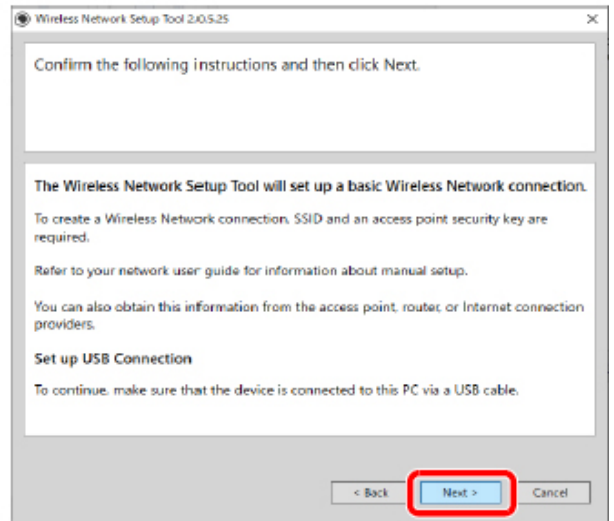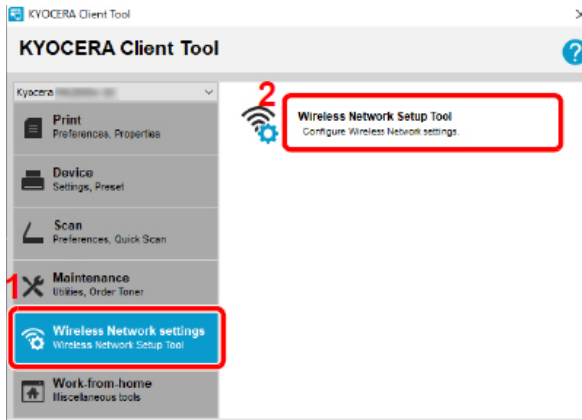


## Step 3

1. Select "Do not use WPS".
2. Press Next.

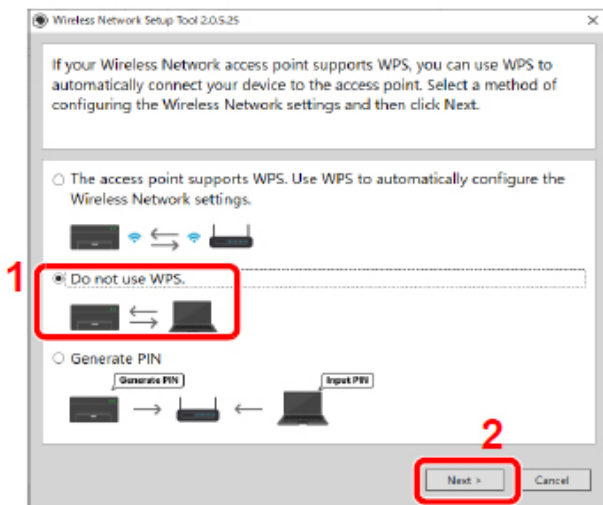


4. Select your access point (Name of your wireless network) you want to connect the device, and then click **Next** >.

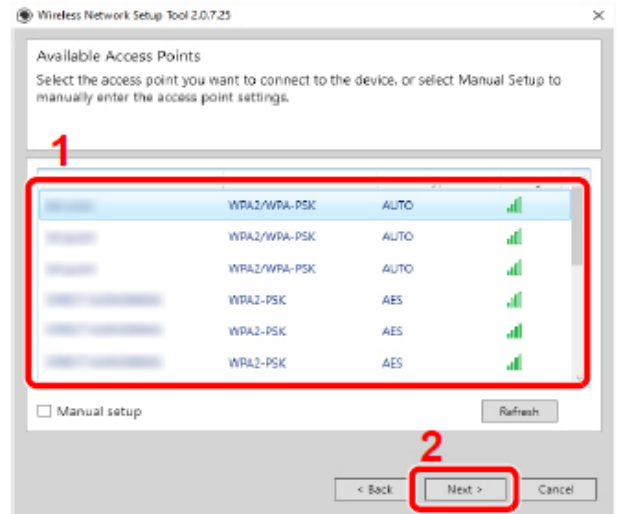

**Note:** To manually enter the access point settings, select **Manual Setup**.

5. Enter the pre-shared key (Your wireless password), and then click **Next** >.

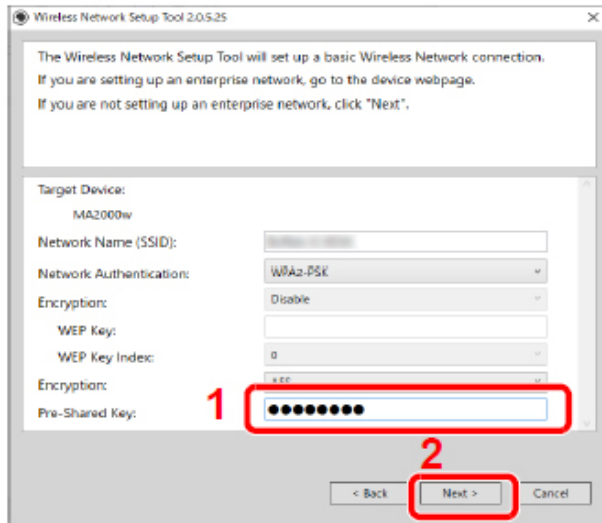


6. Select the check boxes of functions you want to use with Wireless Network connection, and click Finish.
7. The network between this machine and the computer is now configured.
8. The USB cable can now be removed and your device can be placed in your preferred location.

## Wireless Setup for Windows (WPS)

If your router supports WPS, you can configure network connection using the WPS push button on your router.

1. Turn on the computer.
2. Press **Wireless Network** (📶) on the operation panel of the machine. The wireless network indicator flashes.
3. Press the WPS button on the router.

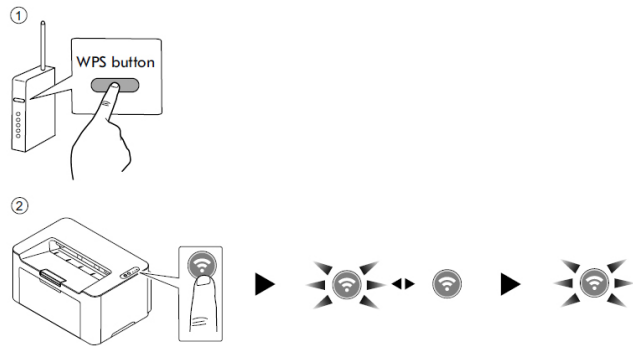

### Support

1. To Register your Product, go to:  
<https://www.kyoceradocumentsolutions.us/en/support/register>
2. For additional Information, please go to the URL for the Product Support Page.  
<https://www.kyoceradocumentsolutions.us/en/products/mfp/MA2000W>  
<https://www.kyoceradocumentsolutions.us/en/products/printers/PA2000W>
3. Speak to a Technical Representative **Call 1-800-255-6482**




# Wireless Setup for MAC (WPS)

Before setting up printer you first must, download the Mac Driver from [Kyocera.info](http://Kyocera.info) and run the installer. This will install all software required.

## Step 1

If your router supports WPS, you can configure network connection using the WPS push button on your router. Check your router manual to WPS support.


1. Turn on the computer.
2. Press **Wireless Network** (📶) on the operation panel of the machine. The wireless network indicator flashes.
3. Press the WPS button on the router.

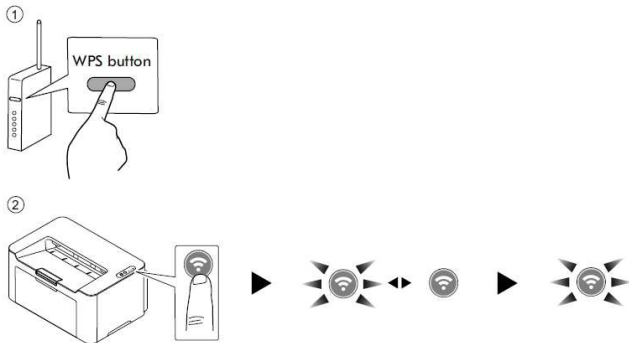

4. The network between this machine and the router is being configured. If the network connection between this machine and the router completes, **Wireless Network** (📶) will light up.


5. Print a Status page.

- + Press and hold the Mode Select key for 3 seconds.
- + The attention light will start flashing and status page will be printed.

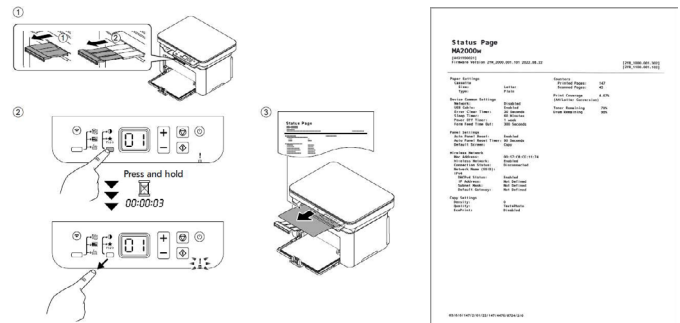


## Step 2


1. Select the Apple icon and then System Preferences.
2. Select Printers and scanners.

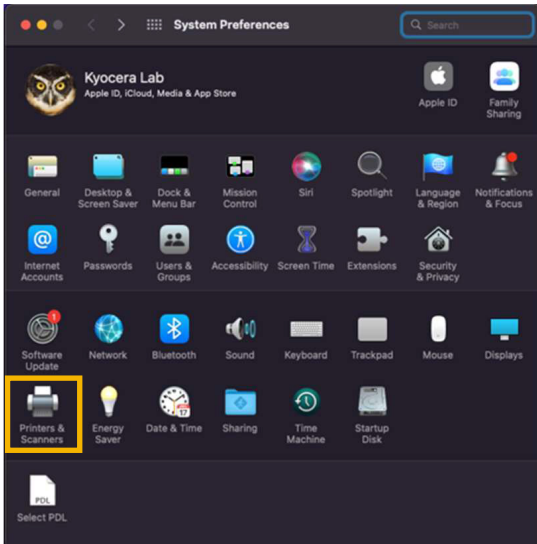


3. Select the "+" to add a new printer.

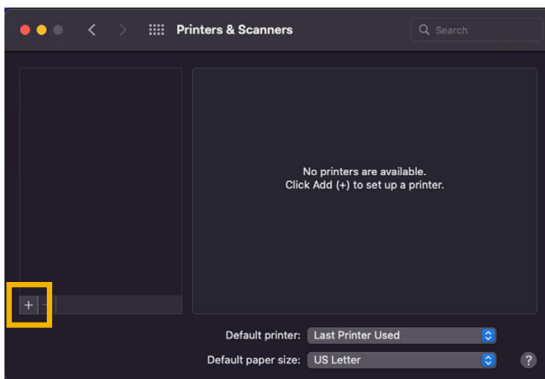

4. Select the center tab (IP) enter the IP address listed on the status page printed from Step 1. Select LPD. Select drop down next to "Use" press Select Software.

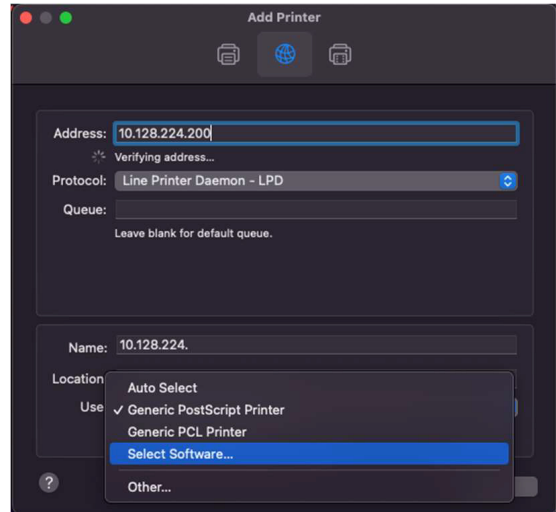

5. Scroll to printer, select ok and press Add.

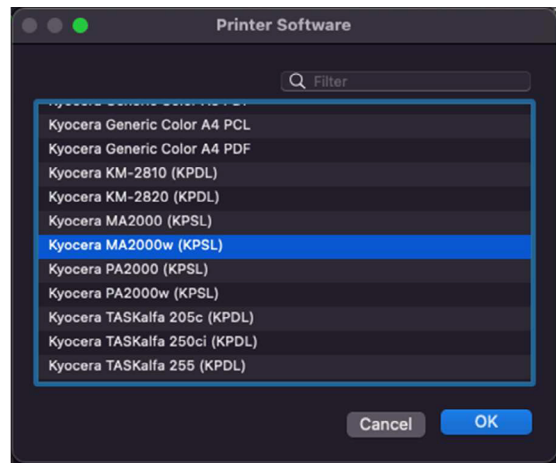

## Support


1. To Register your Product, go to:  
<https://www.kyoceradocumentsolutions.us/en/support/register>
2. For additional Information, please go to the URL for the Product Support Page.  
<https://www.kyoceradocumentsolutions.us/en/products/mfp/MA2000W>  
<https://www.kyoceradocumentsolutions.us/en/products/printers/PA2000W>
3. Speak to a Technical Representative **Call 1-800-255-6482**

# USB Setup for MAC

## Step 1

Before setting up printer you first must, download the Mac Driver from [Kyocera.info](https://www.kyocera.com/usa/kyocera-usa/kyocera-usa) and run the installer. This will install all software required.

1. Open a browser on your computer and type in **Kyocera.info**.
2. Enter your model # and click the model when it shows.

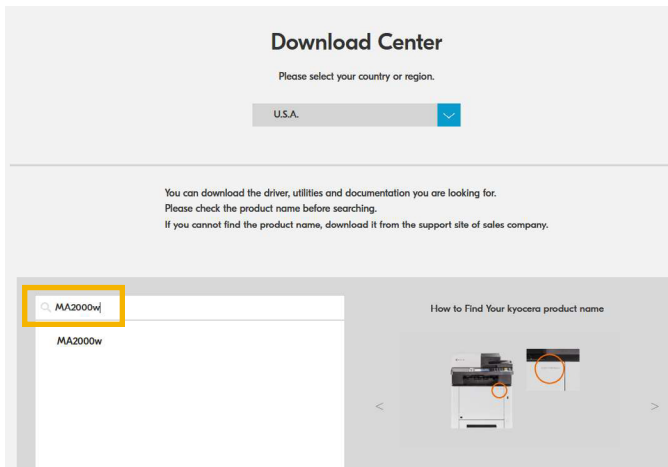


3. Scroll down the page and download the Mac Driver and install it on your computer.



4. Press and hold [Main Power] (●) for 2 seconds or more to turn the power ON.

5. Connect the USB cable to the printer's USB interface connector.


**Note:** Use a USB cable with a rectangular Type A plug and a square Type B plug. The USB cable should be shielded and no longer than 5 meters (16 feet) long.

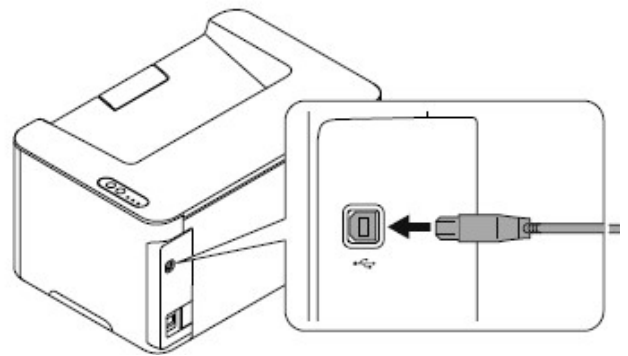




## Step 2

1. Select the Apple icon and then System Preferences.
2. Select Printers and scanners.

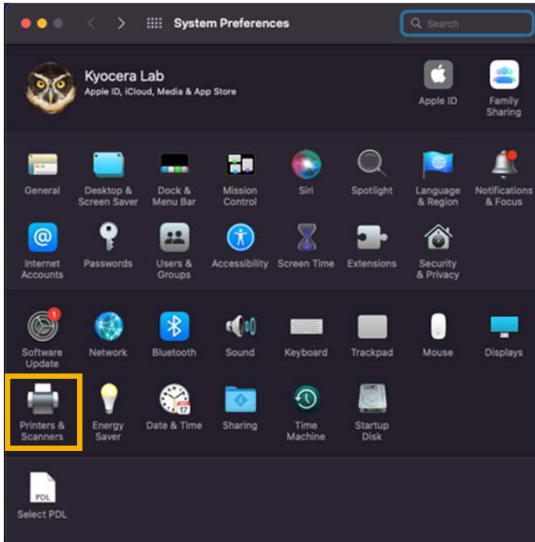


3. Connect to other end of USB cable to the computer's USB slot.

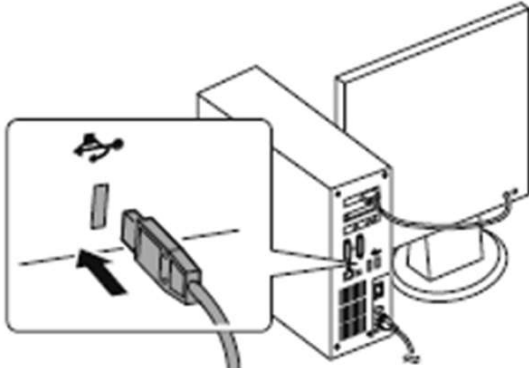


## Step 3

1. Select the "+" to add a new printer.

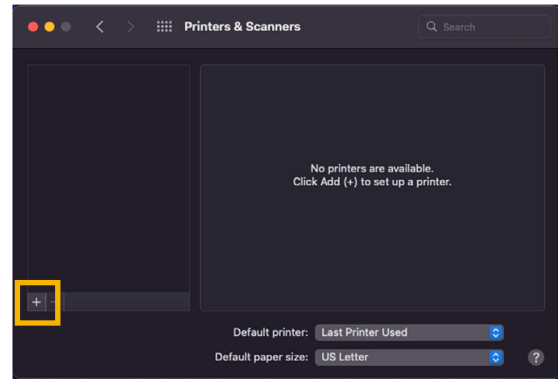

2. Your printer will appear in the first tab. Press Add.

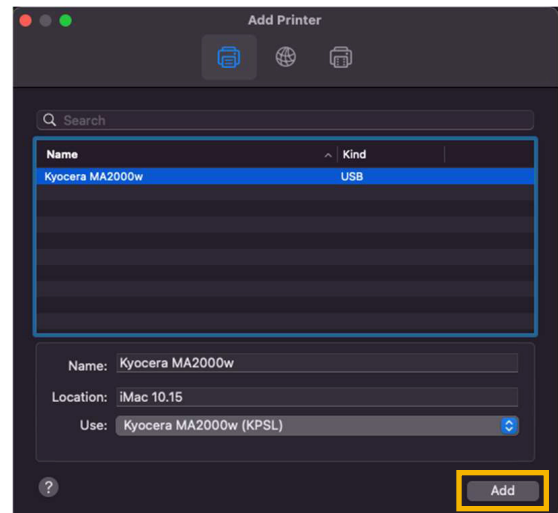

3. Printer is added and ready to print.

## Support

1. To Register your Product, go to:  
<https://www.kyoceradocumentsolutions.us/en/support/register>
2. For additional Information, please go to the URL for the Product Support Page.  
<https://www.kyoceradocumentsolutions.us/en/products/mfp/MA2000W>  
<https://www.kyoceradocumentsolutions.us/en/products/printers/PA2000W>
3. Speak to a Technical Representative **Call 1-800-255-6482**

Kyocera Document Solutions has championed innovative technology since 1934. We enable our customers to turn information into knowledge, excel at learning and surpass others. With professional expertise and a culture of empathetic partnership, we help organizations put knowledge to work to drive change.

KYOCERA Document Solutions America  
225 Sand Road, PO Box 40008  
Fairfield, New Jersey 07004-0008, USA  
Tel: 973-808-8444



[kyoceradocumentsolutions.us](https://www.kyoceradocumentsolutions.us)